

Calma

nurus

Adaptable Sizes
Unlimited Flexibility

7 Solutions

Internationally Recognized
Certifications

15+

Acoustic Attenuation Rate
*according to ISO 23351-1

Class - A

Design
Awards

4+

Air Circulation within Pod
*Calma For U

139 times / hour

Warranty

5 Years



Calma

Product Family



Calma Small
39.4x43.3x91 in / 100x110x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Excellent Voice
Clarity



Adjustable
Features



Calma For U
39.4x55.1x91 in / 100x140x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Excellent Voice
Clarity



Broadcast
Quality Lighting



Calma Medium
39.4x86.6x91 in / 100x220x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Excellent Voice
Clarity



Widest Central
Wall in Its Class



Calma Large
56.7x86.6x91 in / 144x220x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Superb Airflow



Maximum
Comfort in 3 sqm



Calma XLarge
74x86.6x91 in / 188x220x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Even Lighting
Distribution



Easy Installation



Calma XXL
108.6x86.6x91 in / 276x220x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Superb Airflow



Even Lighting
Distribution



Calma For All
74x86.6x91 in / 188x220x231 cm



Indoor Air Quality
IAQ Gold



Class A Certified
Sound Performance



Superb Airflow



Accessible
Privacy

Reduced Noise, Improved Concentration

ISO
23351-1

Exposure to sound pollution can cause stress related cardiovascular disorders and make it harder to focus. A quick escape from noise, Calma creates the perfect space with **Class A Sound Performance, tested according to ISO 23351-1.**

Ideal voice clarity is developed with the specially engineered multilayer acoustic system of Calma **to reduces noise across frequencies.** Allowing voices and sounds to be perceived clearly within the space.

Constantly tested and re-developed within Nurus' in-house Acoustic Lab, materials used to create Calma set new standards. Unlike others; Calma ensures **a balanced blockage of both low and high-frequency sounds.** This ongoing R&D makes Calma a leader in setting new benchmarks for the industry.



We Care About The Air You Breathe



Air Flow

Air Flow within the cabinet

The air exchange rate indicates how frequently the pod completes a full cycle of air circulation.

This rate is measured in air changes per hour. **According to the latest ventilation data, Calma pods provide air exchange rates of up to 139 times per hour, depending on the model.**

Designed to support fresh indoor air conditions, Calma pods provide effective ventilation within their compact volume. This rate helps explain how often indoor air is refreshed, supporting a comfortable environment for users. Additionally, the well designed air inlet area contributes to effective air circulation and helps enhance overall indoor air conditions.



Calma For U
Air Exchange Period
Every

26 seconds

Calma For U
Air Inflow

235 m³/h



*These figures are based on evaluating Calma For U with ventilation fans operating at 100% capacity.



Lighting

Reducing Stress is More Important Than Ever

Have you experienced visual strain lately?

Long hours of exposure to light may contribute to visual discomfort, fatigue and distraction.

Calma's lighting is designed to support a comfortable visual experience inside the pod. With an adjustable color temperature range of 2700 K to 6500 K, users can select a warmer or cooler light setting depending on their preference and the type of work being performed.

Carefully calculated brightness and lighting distribution help create a balanced environment for meetings, focused work and video calls. Engineered lighting distribution ensures that users have sufficient illumination to work comfortably during long meetings or focus sessions.

Certified Quality, Awarded Design

By integrating sustainable manufacturing techniques, renewable energy sources, and recyclable components, **Calma sets a new standard for sustainable workplace solutions.**

In pursuit of environmental transparency, **Environmental Product Declarations (EPDs) for selected Calma models** are based on detailed Life Cycle Assessment (LCA) studies and developed in **accordance with ISO 14025 and EN 15804 standards.** These declarations provide transparent, science-based information on the environmental impacts of the product throughout its life cycle.

Calma pods are **certified by UL 962A – Standard for Safety Household and Commercial Furnishings**, the gold standard for workplace safety and reliability. Ensuring full compliance with strict U.S. and Canadian safety standards, **Calma pods meet rigorous safety, fire resistance, and electrical performance standards.** Calma Series have been successfully **tested in accordance with UL 723 (ASTM E84) – Test for Surface Burning Characteristics of Building Materials** by UL Laboratories.

Awarded by the Red Dot, iF Design and German Design Award for its outstanding design and by the Green Good Design Award for its sustainability, Calma For U stands out as a benchmark in responsible innovation.



*Testing process nearing completion

Sustainable & VOC-Free HDF Powder Coating



Easy to
Clean



Low Risk of
Fire Hazard



100% Healthy
Eco-Friendly



Odorless



Durable



Non-Toxic



0% Paint
Waste

Healthy & Sustainable

Calma: Built to Sustain, Committed to Health



Calma spaces are made with **100% solar energy** and an unwavering dedication to sustainability. Calma exemplifies commitment to environmental sustainability through its efficient, innovative manufacturing processes and use of eco-friendly materials.

All Calma spaces are produced entirely within Nurus' extensive **45,000 sqm technology base with 95% vertical integration** and nearly a century of expertise.

Calma spaces are crafted using **HDF powder coating process, which eliminates VOC (organic)** emissions, resulting in a fine-grained, antibacterial surface that is easy to clean and maintain.

This process also uses **lower heat (130-140°C) for curing a thermoset, durable surface**, reducing energy consumption compared to traditional methods.

Calma's structure incorporates responsibly sourced materials, including **FSC® certified wood, and Recycled PET felt**. The result is a fine-grained, antibacterial surface that is easy to clean and maintain.

*Look for our FSC® certified products.

Calma Small

Product Features



Occupancy Indicators 1
Activated by PIR Sensors
Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes

Laminated Rear Glass 2
5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer helps reduce sound transmission and vibration.

Coat Hanger 3
Calma Small include 1 coat hanger in standard PW1500 (grey) finish. Positioned between wall panels, the hanger sits at a height of 172.5 cm from the floor.

Basotect G+ Layering 4
Located within the wall structure, Basotect G+ melamine foam supports high sound absorption performance and contributes to the acoustic comfort of the pod.

Sound Absorbent 5
Recycled Felt Layering
Recycled PET felt layering supports acoustic absorption and surface durability. The material is easy to clean and selected to meet relevant fire performance requirements.

6 Air Ventilation
2 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

7 Dimmable LED Lights
16 W per light module
Adjustable color temperature: 2700 K - 6500 K
Max. 300 lux, measured on the table top

8 Desktop Socket
Standard black socket unit with powder coated aluminium frame
1 socket unit
1 USB A+C Port

9 Standard Fixed Desk or Optional Height Adjustable Desk
HDF powder-coated desktop with matte textured finish.
Height adjustable range: 68 to 118 cm.
Weight capacity: 15 kg on fixed-height desk; 50 kg max. on height-adjustable desk.
Spiral cable extension: 500 mm, GST18 socket connection.

10 Tempered Glass Door
12mm single piece tempered glass with up to 150° opening angle

STANDARD	FOR USA
3 - Meter Main Power Cable	US 5-15R P to IEC C13 power cord
220 - 240 VAC Type F Plug	10 ft length , 110 VAC-
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available	-
Max. 8A Outlet	-
Operating at full power, total power consumption: 32 Watts	Max. 13A Outlet
	Operating at full power, total power consumption: 32 Watts

12 Seismic Footplates & Castors
Along with castors or fixed glides, Calma models are equipped with footplates for securing the pod placement and fixing it to the floor.

*Gravity Stool placed within Calma Small is optional furniture.



Touch Screen Panel



Desktop Socket



Coat Hangers



Magnetic Door

Calma

Calma For U

Product Features



- Occupancy Indicators 1**
Activated by PIR Sensors
Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes
- Laminated Rear Glass 2**
5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer
- Coat Hanger 3**
Calma For U includes 1 coat hanger in standard PW1500 (grey) finish. Positioned between wall panels, the hanger sits at a height of 172.5 cm from the floor.
- Basotect G+ Layering 4**
Located within walls of Calma, below fabric layers
High sound absorption capacity
VOC and mineral wool free
Low Risk of Fire Hazard
- Power Socket on Desktop 5**
Standard black plastic with powder coated aluminium frame
w/o Media Wall: 1 unit Desktop Socket
w/ Media Wall: 1 unit Links Module
- Tempered Glass Door 6**
12mm single piece tempered glass with up to 180° opening angle
- Sound Absorbent 7**
Recycled Felt Layering
Antibacterial, Anti-Allergen
Oil and water repellent, easy to clean
Recycled PET Felt
Fire Rates: B,S1, d0 (EN-13501)



- 8 Air Ventilation**
2 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom
- 9 Dimmable LED Lights**
Osram Dimmer LED's
16W (per 1 pc light module)
2700K Warm Light
Up to 250 Lux, measurement on the table top
- 10 Media Wall & Integrated Facelights**
(Standard Feature for US Orders; Optional Feature for Global Orders)
Compatible with screens up to 32 inches
- 11 Reservation Screen**
(Optional)
- 12 Depth Adjustable Desk**
HDF powder coated with matte, textured finish, depth adjustable (16 cm retractable) at fixed height (74 cm)
Max. weight carried: 50 kgs
Spiral cable extention: 500mm, GST 18 socket connection
- 13 Main Power Unit**

STANDARD	FOR USA
3000 mm Main Power Cable	US 5-15 P to IEC C13 power cord
220V-240V Type F Plug	10 ft length (110 VAC)
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available	-
Max. 8A Outlet	-
Operating at full power, w/o media wall total power consumption: 45 Watts	Max. 13A Outlet
	Operating at full power, w/o media wall total power consumption: 45 Watts
- 14 Seismic Footplates & Castors**
Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground

*Mou office chair placed within Calma For U is an optional furniture.



Touch Screen Panel



Magnetic Door



Media Wall
Please see electrical specifications page for detailed information



Optional Soft Seating

Calma

Calma Medium

Product Features



- Occupancy Indicators 1**
Activated by PIR Sensors
Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes
- Laminated Rear Glass 2**
5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer on the back and front windows
- Sound Absorbent 3**
Recycled Felt Layering
Antibacterial, Anti-Allergen
Oil and water repellent, easy to clean
Recycled PET Felt
Fire Rates: B,S1, d0 (EN-13501)
- Meeting Table 4**
(Optional)
500x700mm desk for two people, height 74 cm
- Tempered Glass Door 5**
12mm single piece tempered glass with up to 180° opening angle
- Seismic Footplates & Castors 6**
Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



- 7 Air Ventilation**
4 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom
- 8 Dimmable LED Lights**
Osram Dimmer LED's
16W (per 1 pc light module)
2700K Warm Light
Up to 250 Lux, measurement on the table top
- 9 Coat Hangers**
Calma Medium includes 2 sets (4 pcs) of coat hangers in standard PW1500 (grey) finish. Positioned between wall panels, the hangers sit at a height of 172.5 cm from the floor.
- 10 Basotect G+ Layering**
Located within walls of Calma, below fabric layers
High sound absorption capacity
VOC and mineral wool free
Low Risk of Fire Hazard
- 11 Monitor Mount**
(Optional)
Compatible with screens up to 32 inches
- 12 Links Electrification Module & Touch Screen Panel**
- 13 Main Power Unit**

STANDARD	FOR USA
3000 mm Main Power Cable	US 5-15 P to IEC C13 power cord
220V-240V Type F Plug	10 ft length (110 VAC)
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available	-
Max. 8A Outlet	-
Operating at full power, total power consumption: 54 Watts	Max. 13A Outlet
	Operating at full power, total power consumption: 54 Watts

*Alava office chair placed within Calma Medium is an optional furniture.



Touch Screen Panel



Magnetic Door



Nurus Links
Please see electrical specifications page for detailed information



Coat Hangers

Calma Large

Product Features



Occupancy Indicators 1

Activated by PIR Sensors

Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes

Sound Absorbent 2

Recycled Felt Layering

Antibacterial, Anti-Allergen
Oil and water repellent, easy to clean
Recycled PET Felt
Fire Rates: B,S1, d0 (EN-13501)

Monitor Mount 3

(Optional)

Compatible with screens up to 32 inches

Links Electrification Module 4 & Touch Screen Panel

Laminated Rear Glass 5

5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer on the back, and front windows

Meeting Desk & Soft Seating 6

(Optional)

680x900mm desk for up to four people, height 74 cm
Built-in Soft Seating with cushions and padded seat

Seismic Footplates & Castors 7

Along with castors or fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



8 Air Ventilation

6 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

9 Dimmable LED Lights

Osram Dimmer LED's
16W (per 1 pc light module)
2700K Warm Light
Up to 250 Lux, measurement on the table top

10 Coat Hangers

Calma Large includes 2 sets (4 pcs) of coat hangers in standard PW1500 (grey) finish. Positioned between wall panels, the hangers sit at a height of 172.5 cm from the floor.

11 Basotect G+ Layering

Located within walls of Calma, below fabric layers
High sound absorption capacity
VOC and mineral wool free
Low Risk of Fire Hazard

12 Tempered Glass Door

12mm single piece tempered glass with up to 180° opening angle

13 Main Power Unit

STANDARD

3000 mm Main Power Cable
220V-230V Type F Plug
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available
Max. 8A Outlet
Operating at full power, total power consumption: 94 Watts

FOR USA

US 5-15 P to IEC C13 power cord
10 ft length (110 VAC)
-
-
-
Max. 13A Outlet
Operating at full power, total power consumption: 94 Watts



Touch Screen Panel



Magnetic Door



Nurus Links

Please see electrical specifications page for detailed information



Coat Hangers

Calma

Calma XLarge

Product Features



Occupancy Indicators 1 Activated by PIR Sensors

Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes

Sound Absorbent 2 Recycled Felt Layering

Antibacterial, Anti-Allergen
Oil and water repellent, easy to clean
Recycled PET Felt
Fire Rates: B,S1, d0 (EN-13501)

Monitor Mount 3 *(Optional)*

Compatible with screens up to 32 inches

Links Electrification Module 4 & Touch Screen Panel

Laminated Rear Glass 5

5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer on the back, and front windows

Meeting Desk 6 *(Optional)*

Full length 680x1200 mm desk for up to four people, height 74 cm

Seismic Footplates 7

Along with fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



8 Air Ventilation

8 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

9 Dimmable LED Lights

Osram Dimmer LED's
16W (per 1 pc light module)
2700K Warm Light
Up to 250 Lux, measurement on the table top

10 Coat Hangers

Calma XLarge includes 2 sets (4 pcs) of coat hangers in standard PW1500 (grey) finish. Positioned between wall panels, the hangers sit at a height of 172.5 cm from the floor.

11 Tempered Glass Door

12mm single piece tempered glass with up to 180° opening angle

12 Basotect G+ Layering

Located within walls of Calma, below fabric layers
High sound absorption capacity
VOC and mineral wool free
Low Risk of Fire Hazard

13 Main Power Unit

STANDARD	FOR USA
3000 mm Main Power Cable	US 5-15 P to IEC C13 power cord
220V-240V Type F Plug	10 ft length (110 VAC)
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available	-
Max. 8A Outlet	-
Operating at full power, total power consumption: 100 Watts	Max. 13A Outlet
	Operating at full power, total power consumption: 100 Watts

*Uneo office chairs and Tau table placed within Calma XLarge are optional furniture.



Touch Screen Panel



Magnetic Door



Nurus Links
Please see electrical specifications page for detailed information



Coat Hangers



Calma

Calma XXLarge

Product Features



Occupancy Indicators 1 Activated by PIR Sensors

Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes

Sound Absorbent 2 Recycled Felt Layering

Antibacterial, Anti-Allergen
Oil and water repellent, easy to clean
Recycled PET Felt
Fire Rates: B,S1, d0 (EN-13501)

Monitor Mount 3 (Optional) Compatible with screens up to 32 inches

Links Electrification Module 4 & Touch Screen Panel

Laminated Rear Glass 5

5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer on the back, and front windows

Meeting Desk 6 (Optional) Full length 680x2000 mm desk for up to four people, height 74 cm

Seismic Footplates 7

Along with fixed glides, Calma models also have footplates for securing the pod placements and fix to ground



8 Air Ventilation

12 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

9 Dimmable LED Lights

Osram Dimmer LED's
16W (per 1 pc light module)
2700K Warm Light
Up to 250 Lux, measurement on the table top

10 Coat Hangers

Calma XXLarge includes 2 sets (4 pcs) of coat hangers in standard PW1500 (grey) finish. Positioned between wall panels, the hangers sit at a height of 172.5 cm from the floor.

11 Basotect G+ Layering

Located within walls of Calma, below fabric layers
High sound absorption capacity
VOC and mineral wool free
Low Risk of Fire Hazard

12 Tempered Glass Door

12mm single piece tempered glass with up to 180° opening angle

13 Main Power Unit

STANDARD	FOR USA
3000 mm Main Power Cable	US 5-15 P to IEC C13 power cord
220V-230V Type F Plug	10 ft length (110 VAC)
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available	-
Max. 8A Outlet	-
Operating at full power, total power consumption: 148 Watts	Max. 13A Outlet
	Operating at full power, total power consumption: 148 Watts

*Alava office chairs and Tau table placed within Calma XXLarge are optional furniture.



Touch Screen Panel



Magnetic Door



Nurus Links
Please see electrical specifications page for detailed information



Coat Hangers



Calma

Calma For All

Product Features



Occupancy Indicators 1 Activated by PIR Sensors

Lights will turn red while in use or for the duration of reserved meetings
Lights will turn green again after use within 3 minutes.

Sound Absorbent 2 Recycled Felt Layering

Antibacterial, Anti-Allergen
Oil and water repellent, easy to clean
Recycled PET Felt
Fire Rates: B,S1, d0 (EN-13501)

Laminated Rear Glass 3

5+5 mm Laminated Rear Glass with 0.76 mm PVB acoustic interlayer on the back, and front windows

Links Electrification Module 4 & Touch Screen Panel

Tempered Glass Door 5

12mm single piece tempered glass with up to 180° opening angle

Basotect G+ Layering 6

Located within walls of Calma, below fabric layers
High sound absorption capacity
VOC and mineral wool free
Low Risk of Fire Hazard

On The Ground Plane 7

To ensure easy access, Calma For All is installed directly on the floor, allowing users to enter and exit without any steps or barriers.



8 Air Ventilation

8 pcs. Fan Module
Airflow per fan 182,5 m³/h
Reversible airflow direction upon request. The standard flow enters from top between walls and felt ceiling, exits from ventilation grill at the bottom

9 Dimmable LED Lights

Osram Dimmer LED's
16W (per 1 pc light module)
2700K Warm Light
Up to 250 Lux, measurement on the table top

10 Automatic Closing Door

Calma For All features an automatic closing door designed to enhance accessibility. The door closes softly once the applied pressure is released.

11 Coat Hangers

Calma For All includes 2 sets (4 pcs) of coat hangers in standard PW1500 (grey) finish. Positioned between wall panels, the hangers sit at a height of 172.5 cm from the floor.

12 Foldable Desk & Built in Seating

Calma For All offers fully inclusive functionality with its foldable design. Aligns with the guidance provided in 2010 ADA Standards for Accessible Design, Section 304.3.1, regarding circular turning spaces.

The 942mm x 650mm desk can be folded upright when not in use or locked in place at a 747mm height. Max. weight carried: 15 kgs.

The foldable seating allows multiple configurations: seating for four, seating for two plus space for a wheelchair, or space for two wheelchair users.

Calma For All can also be ordered without foldable features. In this case, please refer to Calma For All Lite.

13 Main Power Unit

STANDARD	FOR USA
3000 mm Main Power Cable	US 5-15 P to IEC C13 power cord
220V-240V Type F Plug	10 ft length (110 VAC)
UK Plug, F Type Plug, Swiss Plug, or Multinational socket is available	-
Max. 8A Outlet	-
Operating at full power, total power consumption: 100 Watts	Max. 13A Outlet
	Operating at full power, total power consumption: 100 Watts



Touch Screen Panel and Links Module
Please see electrical specifications page for detailed information



Magnetic Door



Accessible Design



Foldable Features

Technical Specifications



		Calma Small	Calma For U	Calma Medium	Calma Large	Calma XLarge	Calma XXLarge	Calma For All
Dimensions	Exterior	 39.4x43.3x91 in 100x110x231 cm	 39.4x55.1x91 in 100x140x231 cm	 39.4x86.6x91 in 100x220x231 cm	 56.7x86.6x91 in 144x220x231 cm	 74x86.6x91 in 188x220x231 cm	 108.6x86.6x91 in 276x220x231 cm	 74x86.6x91 in 188x220x231 cm
	Interior	34.9x36.6x80.8 in 89x93x205 cm	34.9x48.4x80.8 in 89x123x205 cm	34.9x80.7x80.8 in 89x205x205 cm	52.2x80.7x80.8 in 133x205x205 cm	69.5x80.7x80.8 in 176x205x205 cm	104.2x80.7x80.8 in 265x205x205 cm	69.5x78.3x84.6 in 176.6x205x215 cm
Mobility		Can be moved by 1 person	Can be moved by 1 person	Can be moved by 1 person	Can be moved by 2 people	-	-	-
Cushioned Soft Seating Option		-	Optional	Optional	Optional	-	-	Optional Foldable, Built-in Seating
Max User Capacity		1 person	1 person	2 people	4 people	4 people	6 people	4 people seat or 2 wheelchairs
Air Fans		2 pcs	2 pcs	4 pcs	8 pcs	8 pcs	12 pcs	8 pcs
Castors		4 pcs	4 pcs	4 pcs	6 pcs	-	-	-
Fixed Feet		5 pcs	5 pcs	8 pcs	16 pcs	16 pcs	24 pcs	-
Table		Standard 370x820mm h: 960mm	Standard 370x883mm h: 740mm	Optional 500x700mm h: 740mm	Optional 680x900mm h: 740mm	Optional 680x1200mm h: 740mm	Optional 680x2000mm h: 740mm	Optional 651x942mm h: 747mm

Calma Small's optional height adjustable table can move from 68 to 118 cm or can be placed at standard fixed height: 96 cm.
Calma For U's retractable table can change its depth up to 15 cm at fixed 74 cm height.
When installed, the height of the Calma pod can be adjusted by ±1 cm via the castors or leveling feet.

Electrical Specifications




	Calma Small	Calma For U	Calma Medium	Calma Large	Calma XLarge	Calma XXLarge	Calma For All
							
Total Power Consumption	32 W	32 W, 45 W with Media Wall	54 W	94 W	100 W	148 W	100 W
Power Socket	Desktop Socket	Desktop Socket	Within Links (2 pcs: Global 3 pcs: US orders)	Within Links (2 pcs: Global 3 pcs: US orders)	Within Links (2 pcs: Global 3 pcs: US orders)	Within Links (2 pcs: Global 3 pcs: US orders)	Within Links (2 pcs: Global 3 pcs: US orders)
RJ45 Ethernet Entry	On Kickplate for Global Orders, Not Available for US	On Kickplate for Global Orders, Not Available for US	Within Links for Global Orders, Not Available for US	Within Links for Global Orders, Not Available for US	Within Links for Global Orders, Not Available for US	Within Links for Global Orders, Not Available for US	Within Links for Global Orders, Not Available for US
HDMI	-	-	Optional with Monitor Mount (1 pc)	Optional with Monitor Mount (1 pc)	Optional with Monitor Mount (1 pc)	Optional with Monitor Mount (1 pc)	Optional with Monitor Mount (1 pc)
Media Wall	-	Optional	-	-	-	-	Under Development
Monitor Mount	-	Optional (Within Media Wall, Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	Optional (Compatible with screens up to 32 inches)	-
USB A + C	On Desktop Socket	On Desktop Socket	Within Links module	Within Links module	Within Links module	Within Links module	Within Links module

The RJ45 Ethernet Data Cable can be used from the floor or the ceiling of the product.
Power sockets can be selected as European, Swiss (only available for DACH region), UK, US or Multinational types.
Recommended screen sizes are determined based on a comfortable viewing distance for users.
TV screens or monitors are not included in Calma products and must be bought seperately.

*Please see page 38-39 for detailed information of Media Wall and illustrated Links modules.


Packaging Specifications

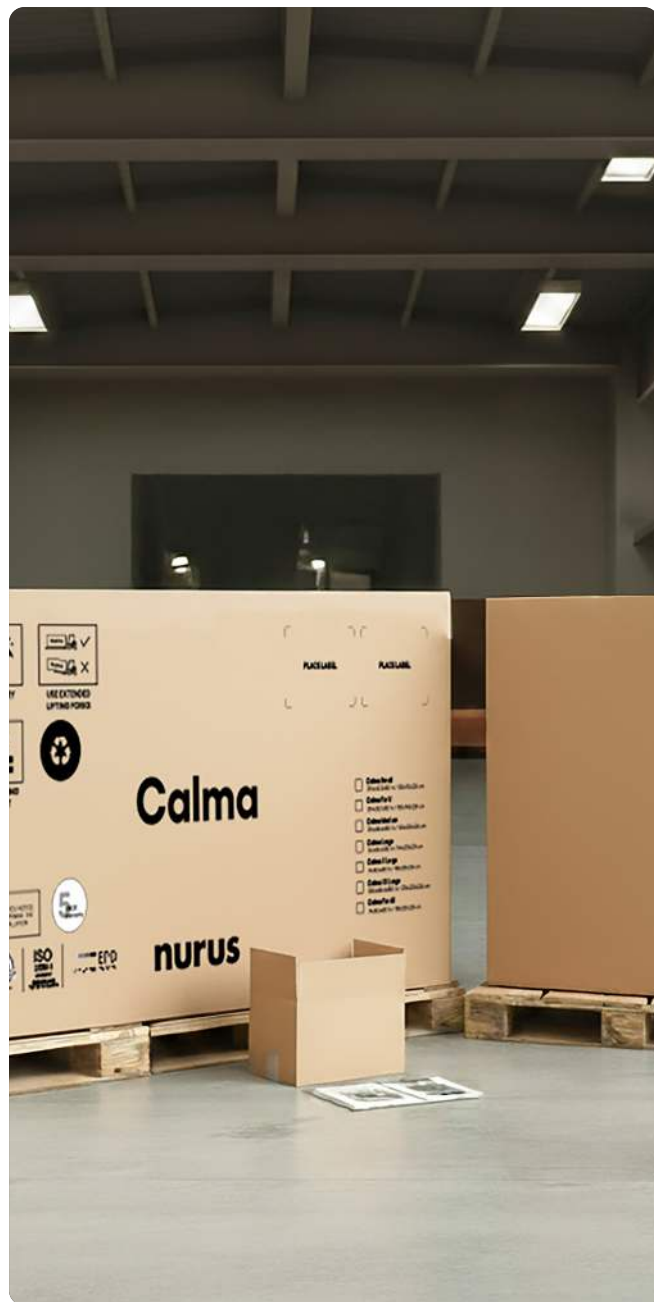


	Calma Small	Calma For U	Calma Medium	Calma Large	Calma XLarge	Calma XXLarge	Calma For All
Dimensions	 39.4x43.3x91 in 100x110x231 cm	 39.4x55.1x91 in 100x140x231 cm	 39.4x86.6x91 in 100x220x231 cm	 56.6x86.6x91 in 144x220x231 cm	 74x86.6x91 in 188x220x231 cm	 108.6x86.6x91 in 276x220x231 cm	 74x86.6x91 in 188x220x231 cm
Packaging	 1 Cardboard Crate 72x230x125 cm	 1 Cardboard Crate 72x230x125 cm	 1 Cardboard Crate 82x230x125 cm	 1 Cardboard Crate 106x230x125 cm	 2 Cardboard Crates 72x230x125 cm	 2 Cardboard Crates 72x230x125 cm	 2 Cardboard Crates 72x230x125 cm
Weight	400 kgs	465 kgs	615 kgs	765 kgs	450 kgs x 2	550 kgs x2	430 kgs x2
Estimated Installation Time*	2 people 25 mins	2 people 30 mins	2 people 35 mins	4 people 45 mins	4 people 70 mins	4 people 110 mins	4 people 70 mins
Optional Soft Seating Packaging	 - 1 Cardboard Box (Gravity) 10 kgs 45x45x60 cm	 - 1 Cardboard Box (Sofa) 30 kgs 90x63x57 cm	 - 1 Cardboard Box(Sofa) 60 kgs 90x63x112 cm	 - 1 Cardboard Box (Sofa) 70 kgs 134x63x112 cm	-	 - 1 Cardboard Box (Walls) 80 kgs 140x85x65 cm	-

*These installation times might last approximately 30-40 mins longer according to circumstances of the space and number of selected optional features of your product.

Built-in Touch Screen Controls

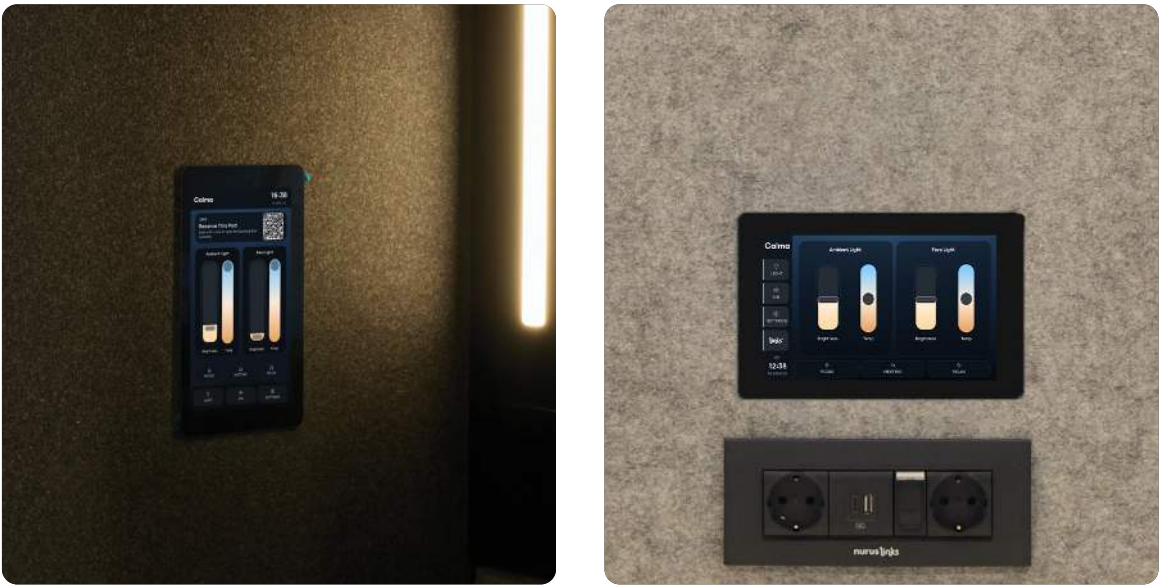

The touch screen panel placed on the interior walls of Calma pods allow you to **control fan speed and light dimmers.**

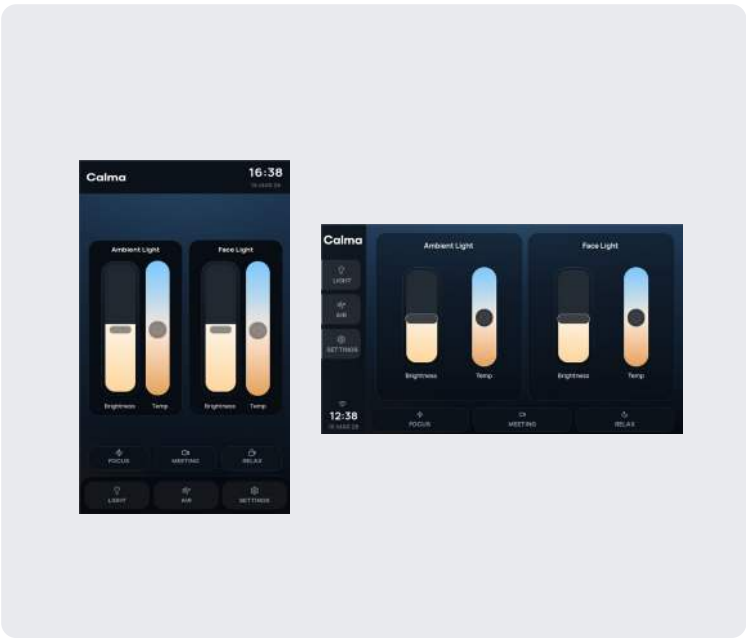


Adjust ventilation and lighting levels with ease using touch screen controls.

Optional Reservation Screen & System



Please note the optional reservation system screen is **available only for Calma For U.** For the remaining Calma models, the reservation system can be accessed with a QR code.

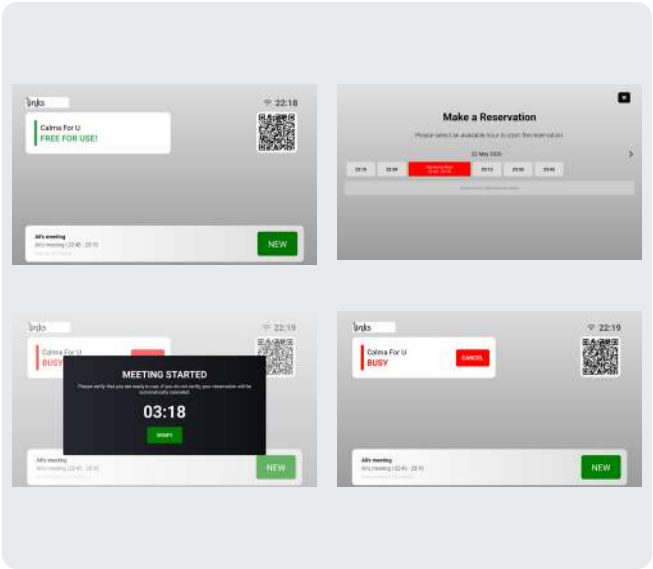


The optional reservation screen placed on the exterior walls of Calma For U allow you to create an **instant meeting by direct access to the system.**

For other Calma models, users can access the reservation system by scanning the QR code displayed on the touch screen.

Calma

Standard Type Electrification

Calma Small



TOUCH PANEL:
FANS, LIGHTS CONTROL




DESKTOP OUTLET
USB A+C



ON THE KICKPLATE:
GST 18 OUTLET,
RJ45 DATA CONNECTOR

Calma For U


(Without Media Wall)



TOUCH PANEL:
FANS, LIGHTS CONTROL




DESKTOP OUTLET
USB A+C




ON THE KICKPLATE:
GST 18 OUTLET,
RJ45 DATA CONNECTOR

(With Media Wall)




TOUCH PANEL:
FANS, LIGHTS
FACELIGHTS CONTROL




ON THE WALL:
1x OUTLET,
USB A+C
RJ45 DATA CONNECTOR

Calma Medium, Large, X Large, XX Large and Calma For All

(Without Monitor Mount)




TOUCH PANEL:
FANS, LIGHTS CONTROL




ON THE WALL:
2x OUTLET
USB A+C
RJ45 DATA CONNECTOR

(With Monitor Mount)



TOUCH PANEL:
FANS, LIGHTS CONTROL



ON THE WALL:
2x OUTLET
HDMI
USB A+C
RJ45 DATA CONNECTOR

Media Wall is an optional integration, only available for Calma For U.

A standard media wall includes:

- 1 Links Unit that contains:
 - 1 pc 220-240 VAC power socket (Max Output Power 750W)
 - 1 pc USB A+C unit
 - 1 pc RJ45 Ethernet data socket


- 2 units of Dimmable Facelights: Optimised digital communication, controlled by the integrated touch panel of Calma For U.

- Behind the screen there are 2 standard connections:
 - 1 pc 220-240 VAC power socket (for mounting screen)
 - HDMI cable tunnel for TV integration

Please note that a TV, Screen or Monitor is not included or attached to the media wall unit.


Maximum 32 inch screens can be mounted on the Media Wall unit. The electrification unit shown on the visual is Multinational Type.

Following Socket Types are supported for Calma:
Multinational (Universal Common Sockets except Switzerland), Schuko (EUR), UK, US (NEMA 5-15R, USA & CANADA)

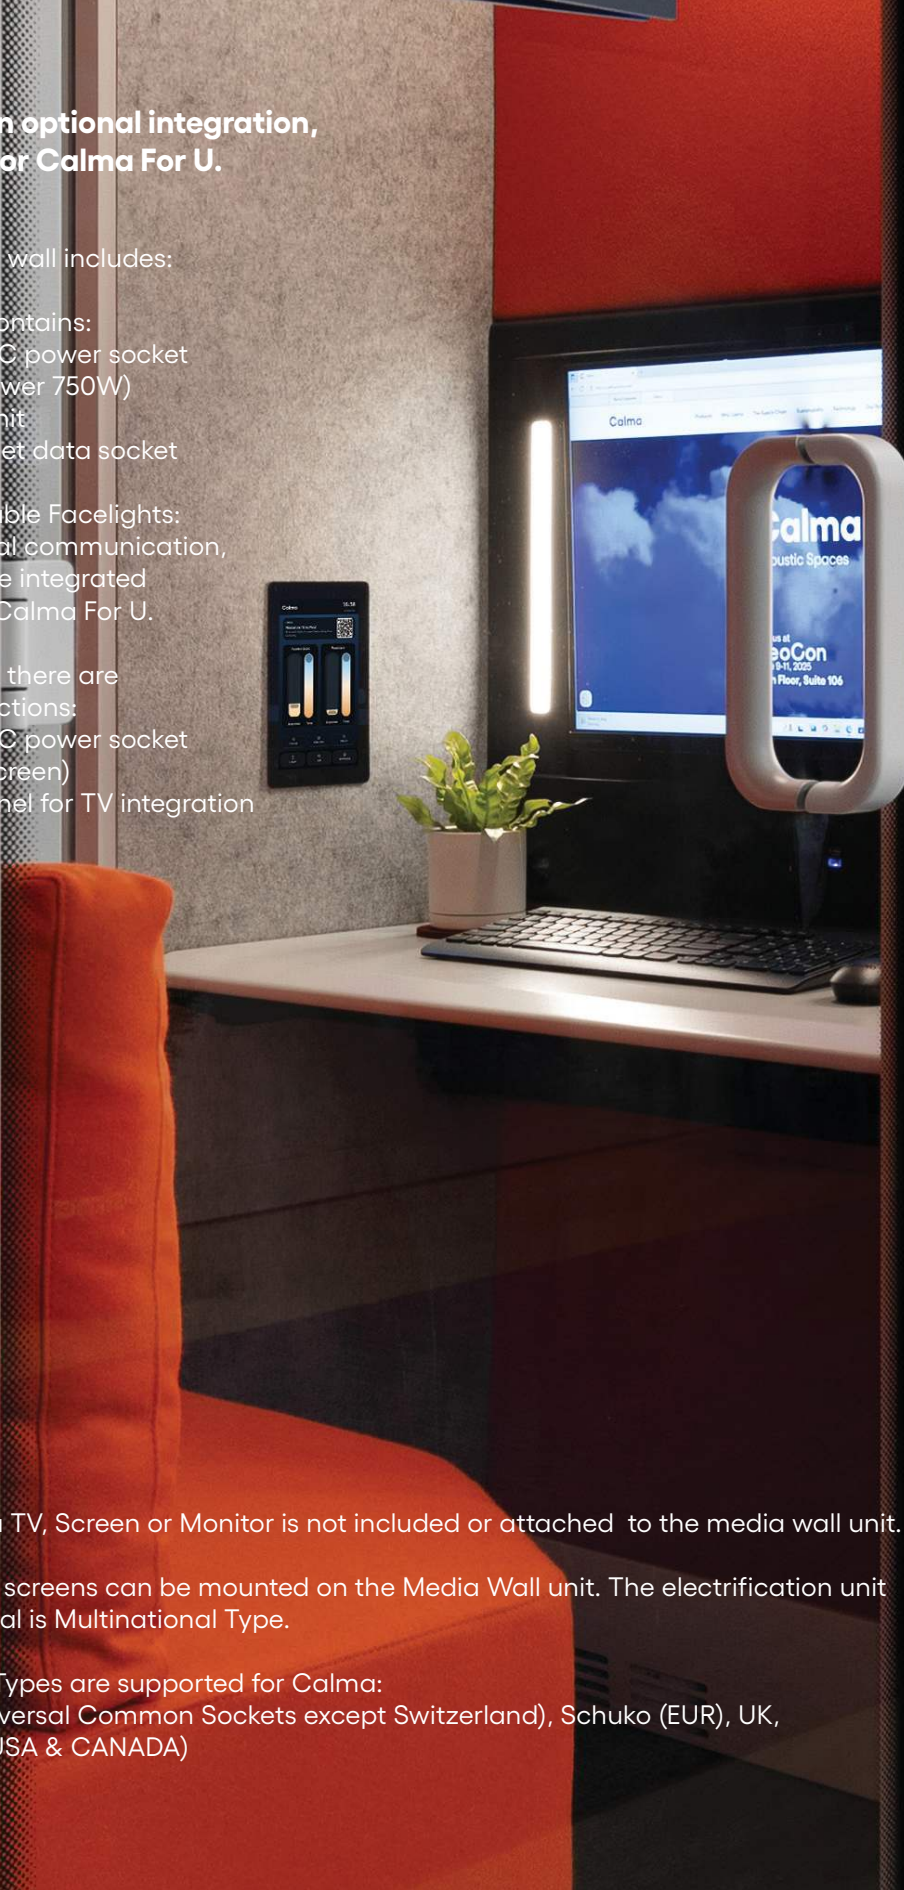


US Type Electrification


Calma Small



TOUCH PANEL:
FANS, LIGHTS CONTROL




DESKTOP OUTLET
USB A+C CHARGER




ON THE KICKPLATE:
2x OUTLET

Calma For U


(Without Media Wall)



TOUCH PANEL:
FANS, LIGHTS CONTROL




DESKTOP OUTLET
USB A+C CHARGER




ON THE KICKPLATE:
2x OUTLET

(With Media Wall)




TOUCH PANEL:
FANS, LIGHTS
FACELIGHTS CONTROL




ON THE WALL:
2x OUTLET,
USB A+C CHARGER

Calma Medium, Large, X Large, XX Large and Calma For All

(With or Without Monitor Mount)



TOUCH PANEL:
FANS, LIGHTS CONTROL



ON THE WALL:
3x OUTLET
USB A+C CHARGER




Media Wall



Height Adjustable Table




Links Modules

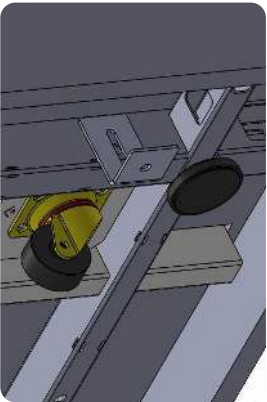

Seismic Foot Plates

Optional Components



Monitor Mount

This component is available for Calma Models of 220 cm (86.6 in) and above width only. Mounting a 27 inch Media Wall or maximum 32 inch screen is recommended.



Housing for Sprinkler

Housing for Sprinkler

On the ceiling of Calma pods, a Ø58 mm (2.28 in) housing for sprinkler installation can be opened upon request. For standard type Calma pods, housing is optional. For US Types, sprinkler housing is drilled as standard. The package does not include the fixtures, only the holes can be drilled.



Reservation Screen


Reservation Screen

Available as an option, only on Calma For U.


Analysis & Reports

Please contact your Nurus representative for detailed information about lab tests and analysis reports of Calma products since measurements are updated periodically for each product.


CO₂ Levels

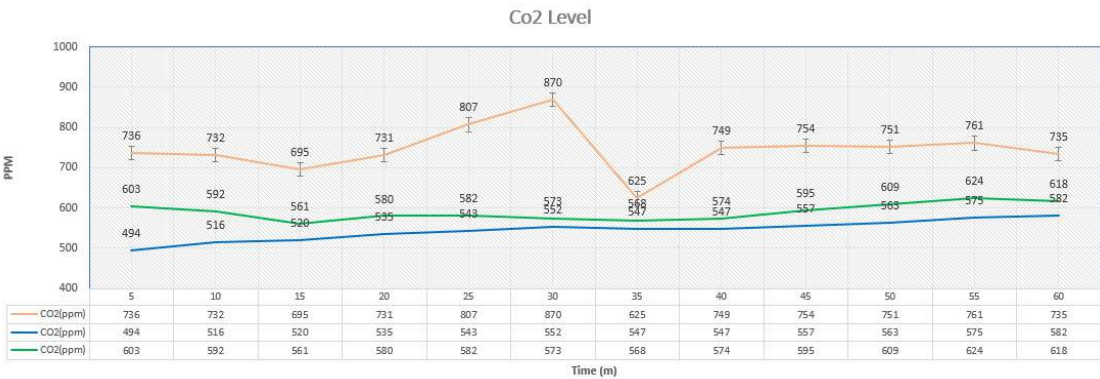

Humidity (%)

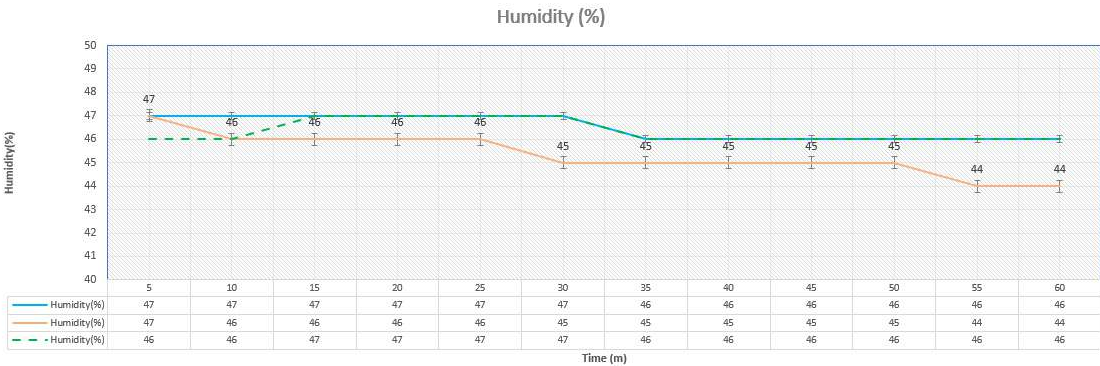

Temperature

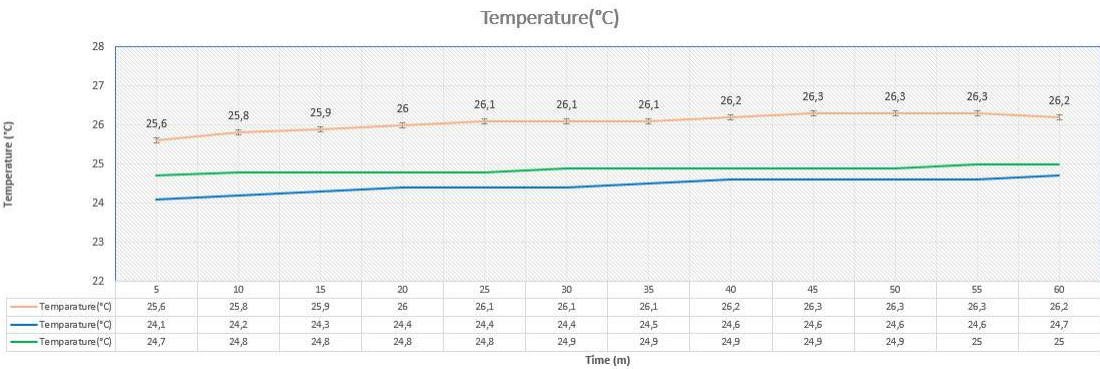



Calma Materials



HDF Powder Coated Exterior Walls and Built-in Furniture
Upholstered Side Walls and Sofas
Recycled PET Felt Ceiling and Back Wall


HDF Powder Coating Finishes

Color options for exterior walls, frame, door handle and table top surfaces.



Felt Options

Color options of recycled PET felt for the ceiling and interior back walls.

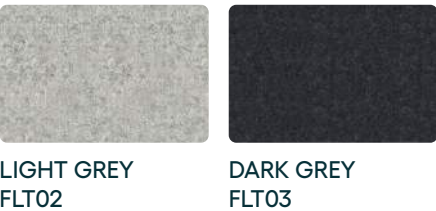

Carpet Options

Color options the ceiling and interior back walls.



Upholstery - Era



NU A3-03




NU A3-08



NU A3-11



NU A3-13



NU A3-14



NU A3-15



NU A3-16



NU A3-20



NU A3-25



NU A3-29



NU A3-34



NU A3-36



NU A3-39




NU A3-41



NU A3-42



NU A3-43



NU A3-45

Upholstery - Rivet



NU A4-03



NU A4-04



NU A4-05



NU A4-09



NU A4-10



NU A4-13



NU A4-14



NU A4-15



NU A4-18



NU A4-19



NU A4-20



NU A4-21



NU A4-25



NU A4-26

Upholstery - Blazer

*Upon Surcharge



NU D1-1K



NU D1-1L



NU D1-1R



NU D1-1W



NU D1-002



NU D1-008



NU D1-012



NU D1-021




NU D1-028



NU D1-035



NU D1-039



NU D1-047



NU D1-063



NU D1-082

Fabric Specifications



ERA



RIVET



BLAZER



100% Polyester

Weight: 320 g/m2 ±5%
Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)
Light Fastness: 5 (ISO 105 - B02)

Flammability
BS 7176 Low Hazard
EN 1021 - 1&2 (cigarette & match)
EN 13501-1 Adhered Class B, s1, d0
EN 13501-1 Un-adhered Class C, s1, d0
BS 7176 Medium Hazard with EnviroFlam5
BS 5852 Ignition Source 5 with EnviroFlam5
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cig & match) with EnviroFlam5



100% Post Consumer Recycled Polyester

Weight: 280 g/m2 ±5%
Fastness to Rubbing
Wet: 4, Dry: 4 (ISO 105 - X12)
Light Fastness: 5-6 (ISO 105 - B02)

Flammability
EN 1021 - 1&2 (cigarette & match)
BS 7176 Low Hazard
UNI 9175 Classe 1 IM
EN 13501-1 Adhered Class B, s2, d0
EN 13501-1 Un-adhered Class B, s1, d0
Optional: Please specify when ordering:
BS 5852 Ignition Source 5 when treated with EnviroFlam5
BS 7176 Medium Hazard when treated with EnviroFlam5
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match) with EnviroFlam5
DIN 4102 B1 with FR Treatment (Gorts)
BS 5867-2: Type B Curtains & Drapes with FR Treatment (Gorts)
EN 13773 Class 1 with FR Treatment (Gorts)



100% Virgin Wool

Weight: 460 g/m2 ±5%
Fastness to Rubbing: Wet: 4, Dry: 4 (ISO 105 - X12)
Light Fastness: 4-6 (ISO 105 - B02)

Flammability
EN 1021 - 1&2 (cigarette & match)
BS 7176 Low Hazard
NF D 60-013
ÖNORM B 3825 & A 3800-1 (over CMHR 58kg/m3 Foam)
UNI 9175 Classe 1 IM
BS 476 Part 7 Class 1 (Adhered)
EN 13501-1 Adhered Class D, s1, d0
IMO FTP Code (Part 8)
The Furniture and Furnishing (Fire Safety) Regulations 1988 (UK domestic cigarette and match)
BS 5852 Ignition Source 5 when FR treated
BS 7176 Medium Hazard when FR treated
BS 476 Part 6 Classes 0 when FR treated (Adhered)
EN 13501-1 Adhered Class B, s1, d0 when FR treated
EN 13501-1 Un-adhered Class D, s2, d0 when FR treated
BS 5867-2 Type B Curtains & Drapes when FR treated
EN 13773 Class 1 (when FR treated)


Calma

Recommendations

Please follow the recommendations and guides when using, installing, or moving Calma for best results.


- Do not plug in appliances more than 220-240 VAC (EUR) or 110-120 VAC (US).
- Ensure the pod is disconnected from the power supply before any intervention.
- The ventilation and lights work at the same time.
- Make sure the lights are on when you are in the pod.
- Do not block the vent grill.
- Keep 15 cm (5.9 in) distances between Calma products and walls.
- Do not smoke inside.
- To have better access to air, we also recommend having at least 20 cm (7.9 in) space distance between the ceiling and pod.
- Keep the door closed at all times.
- Keep fire sources away from Calma at all times.
- **Do not install high power-consuming devices such as heaters or vacuum cleaners inside Calma.**
- The maximum power socket capacity is 750W for standard Calma.

Guide for Placement

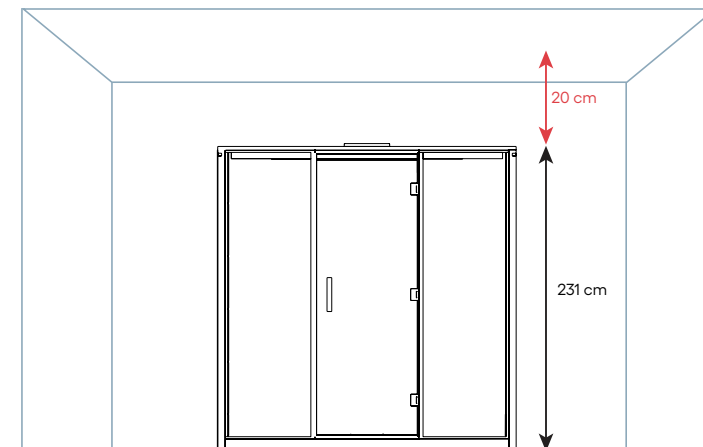

Please ensure sufficient clearance around Calma products for proper air circulation and use. **The minimum recommended space requirement for the total height of Calma models is 231 cm (91 in).**

For safe and proper installation of the ceiling component, please ensure **at least 20 cm (7.9 in) of clearance above the unit.**

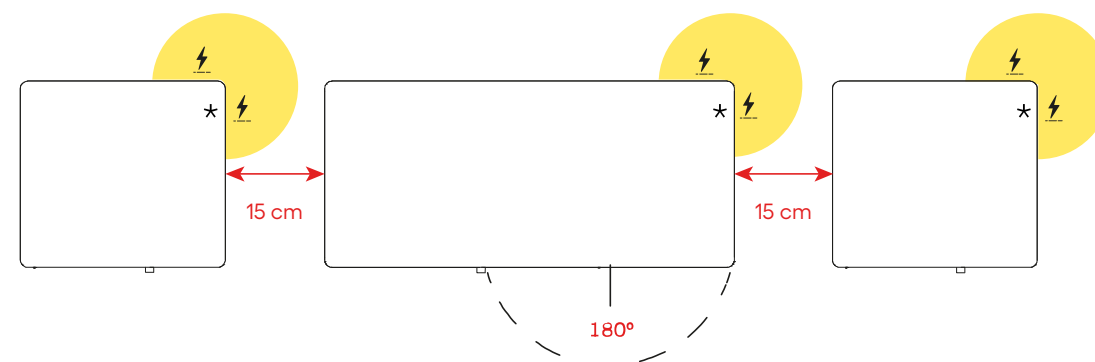

When positioning Calma units, please ensure that the bottom right corner of the back panel is located close to a power source.

US-type Calma products have one power inlet only, located at the bottom right corner of the **right-side wall**. For standard types, the power inlet at the bottom right corner of the **back wall** can also be used.



Visit Our Website
calma.nurus.com



Configure
Your Calma
pCon

nurus